


打标内容:


TYPE:202000405D00-6	TYPE:202000405D00-6
TN:YYYYMMDDXXXX	TN:YYYYMMDDXXXX
Voltage/Current:240V/AC/50A	Tension/courant: 240V/AC/50A
Type 3S	Type 3S
A&T:-30°C ~+50°C	A&T:-30°C ~+50°C

Not for current interrupting  
 Caution!Do not use this product if there is any damage to the EV cable - the plug or the EV connector  
 Ne peut servir à couper le courant  
 Attention: Ne pas utiliser ce produit si le câble VE, la fiche ou le connecteur est endommagé

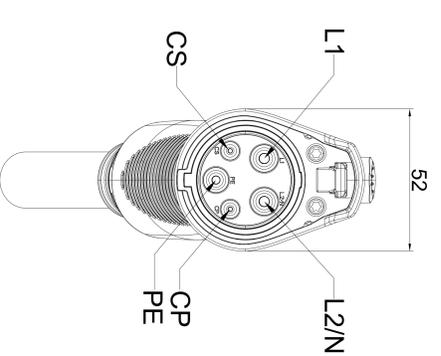

辐射产品信息要求  
 1.字体: 微软雅黑  
 2.YYYYMMDDXXXX: 年/月/日/序列号 (0001-9999)

Type	EVCAV-AC50-M3T1	The Main Material	Thermo Plastic/Silicon Rubber/Copper Alloy
Plug Color	White/Black/Other	Patch Life	≥10000
Rated Current	50A	Fire Rating	UL94 V-0
Rated Voltage	240V	Waterproof Rating	IP67
Resistance Voltage	2000V	Operating Temperature	-30°C to +55°C
Insulation Resistance	>1000MΩ	Cable Specifications	TPPE 3*8AWG+1*20AWG
Contact Resistance	less than 0.5mΩ	Cable Length	5M/Other

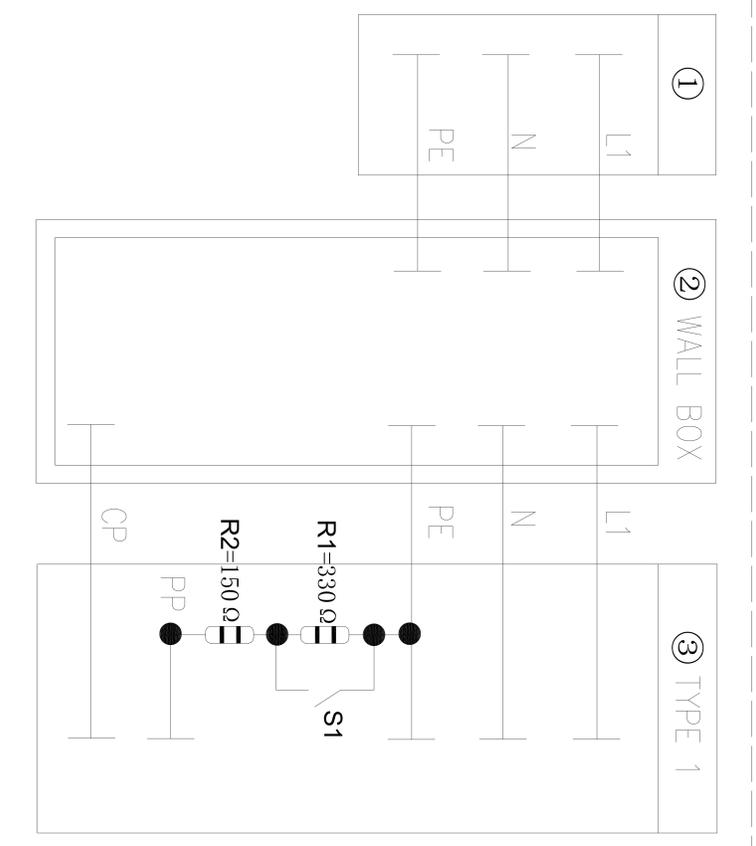

Cable Specification

Pin	Cable	Colour
L1	8AWG	Red
N	8AWG	Black
PE	8AWG	Olivine
PP	20AWG	
CP	20AWG	Orange

图样标记 DWG.SYM	S	凯威莱(无锡)新能源科技有限公司 CAV New Energy Technology Co., Ltd.	
投影标记 PROJ.SYM		名称 NAME	50A 12KW MODE3 T1
设计 DESIGNED	Lucy 20230616	图号 DRAW NO.	EVCAV-AC50-M3T1-SAE1
审核 CHECK		纸幅 SIZE	A4
批准 APPROVED		页码 PAGE	1/1
		版本 VERSION	A0